


Important Information: Deionising Resin Bottle Setup


Please be aware that Deionising (DI) Resin Bottles are not pre-mounted to the van system. You must ensure that there is sufficient space within your vehicle to safely store the DI bottles. Both the 725 RO & DI and the standard DI systems require the use of two SV-FL-817c Resin Bottles. See page 2 for bottle dimensions.

If you opt for installation at one of our locations, our expert engineers will be available to discuss and advise on the optimal placement of the bottles for your van mounted system on the day of installation

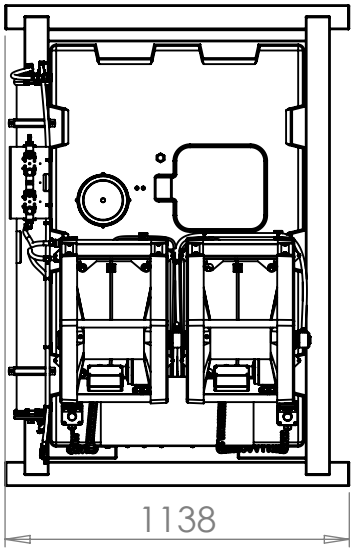

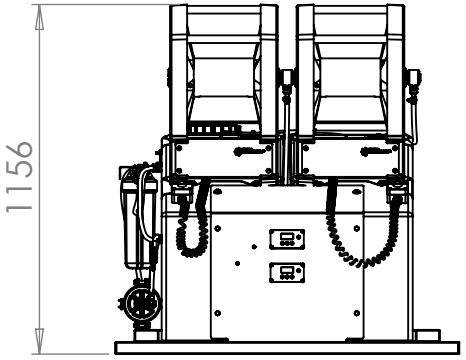


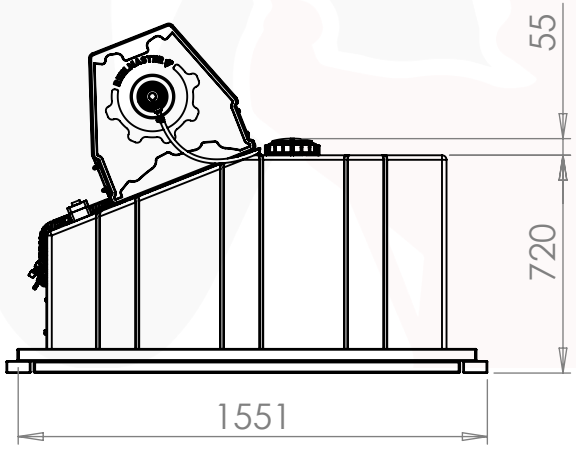


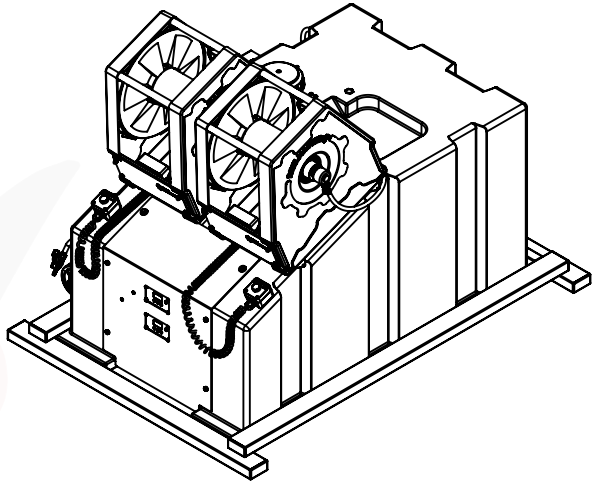


This drawing and the information it contains are the exclusive property of WINDOW CLEANING WAREHOUSE Ltd. Any reproduction or copying is strictly prohibited without the express written permission of WINDOW CLEANING WAREHOUSE Ltd.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	WINDOW CLEANING WAREHOUSE LIMTED
FaceLift® Osmo Compact 525 Dual Operator RO & DI Powered Reels	
A4 SCALE:1:25	5-2-RO-PU
WEIGHT: 168965.25g	



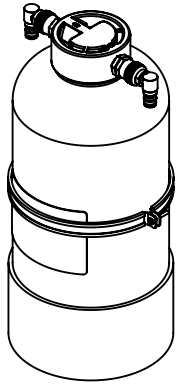

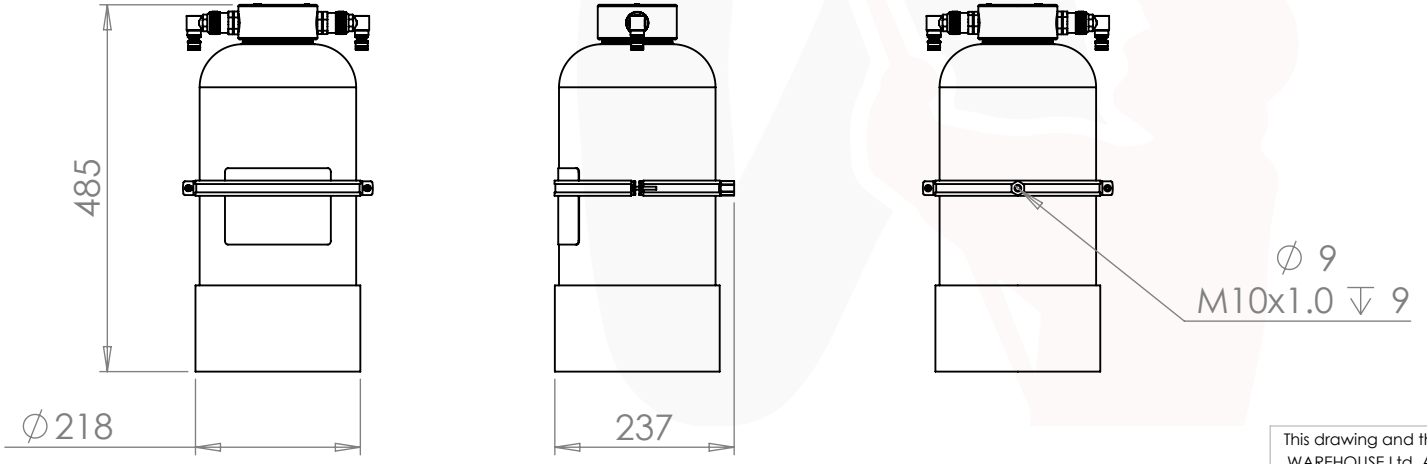

This drawing and the information it contains are the exclusive property of WINDOW CLEANING WAREHOUSE Ltd. Any reproduction or copying is strictly prohibited without the express written permission of WINDOW CLEANING WAREHOUSE Ltd.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	WINDOW CLEANING WAREHOUSE LIMTED
FaceLift® Osmo Compact 525 Dual Operator RO & DI Powered Reels	
A4 SCALE:1:10	5-2-RO-PU
WEIGHT: 168965.25g	